

Three Conductor Solderless  
Lugs




**'PosiGrip'**

90°C RATING (486B LISTED)  
**Patented**

TYPE: A3B2/A3B4

- The unique ridges formed on the bottom of the contact surface are designed to provide contact points for an electrically secure joint of the lowest resistance for current flow.
- The screws used to clamp the conductors are designed to extend beyond the barrel sides of the conductor to allow a better, more secure compression of the conductor. This design spreads the conductor strands to help dissipate heat, and improve its pull-out safety features and capabilities.
- The design of the wire way provides optimum transfer of current, creating a straight line flow through the connector for the least possible path of electrical resistance. A positive wire stop is also provided.

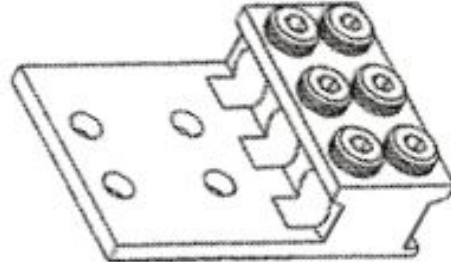

Catalog Number	Fig. No.	Screw Type	Cond. Range AWG	Dimensions, Inches					
				H	W	L	G	D*	T
A3B2-600	1	.38H	600 - 2	1.56	4.18	5.62	0.63	0.56	0.38
A3B2-750	1	.38H	750 - 300	1.94	4.86	6.18	0.63	0.56	0.44
A3B2-1000	1	.50H	1000 - 500	1.94	4.86	6.18	0.63	0.56	0.44
A3B4-600	2	.38H	600 - 2	1.56	4.18	5.62	0.63	0.56	0.38
A3B4-750	2	.38H	750 - 300	1.94	4.86	6.18	0.63	0.56	0.44
A3B4-1000	2	.50H	1000 - 500	1.94	4.86	6.18	0.63	0.56	0.44

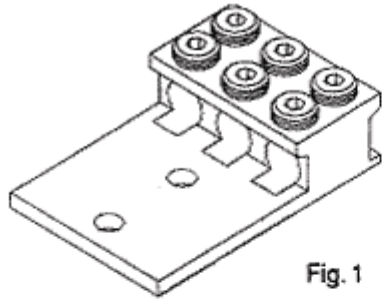


Fig. 1



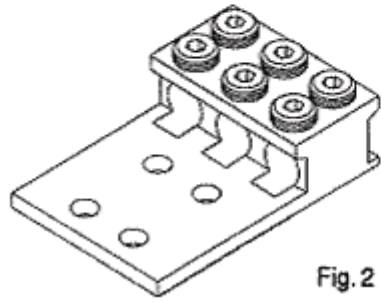


Fig. 2





4300 E. Miraloma Ave. • Anaheim, CA 92807 • Tel. 714.854.1715 Fax 714.854.1716  
[www.cfi1.com](http://www.cfi1.com)

