



Solderless Lugs


TYPE: BC



'PosiGrip'

90°C RATING (486B LISTED)
Patented

- The unique ridges formed on the bottom of the contact surface are designed to provide contact points for an electrically secure joint of the lowest resistance for current flow.
- The screws used to clamp the conductors are designed to extend beyond the barrel sides of the conductor to allow a better, more secure compression of the conductor. This design spreads the conductor strands to help dissipate heat, and improve its pull-out safety features and capabilities.
- The design of the wire way provides optimum transfer of current, creating a straight line flow through the connector for the least possible path of electrical resistance. A positive wire stop is also provided.

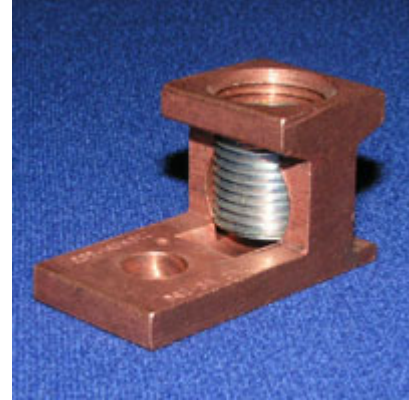

Catalog Number	Fig. No.	Screw Type	Cond. Range AWG	Dimensions, Inches						
				H	W	L	G	D*	T	
BC-50	1	Slot	6 - 14	0.44	0.44	0.81	0.22	0.27	0.09	
BC-70	1	Slot	2 - 14	0.5	0.5	1	0.27	0.27	0.09	
BC-112	1	Slot	1/0 - 14	0.66	0.56	1.12	0.28	0.27	0.16	
BC-125	1	Slot	2/0 - 14	0.78	0.56	1.25	0.31	0.27	0.19	
BC-250	2	.31H	250 - 6	0.97	0.81	1.72	0.44	0.33	0.19	
BC-350	2	.31H	350 - 6	1.12	0.94	2	0.45	0.33	0.19	
BC-500	2	.38H	500 - 4	1.38	1.25	2.37	0.63	0.41	0.26	
BC-600	2	.38H	600 - 2	1.5	1.3	2.5	0.75	0.41	0.26	
BC-750	2	.38H	750 - 1/0	1.68	1.38	2.75	0.75	0.66	0.31	
BC-1000	2	.50H	1000 - 500	1.87	1.5	2.87	0.75	0.66	0.31	

