



Neutral Bar

TYPE: LCB



90°C RATING (486B LISTED)

CMC[®] Copper Neutral connectors are manufactured from high strength pure electrolytic copper to insure both maximum strength and conductivity. Easy to install with screwdriver, wrench or pliers and reusable. Plain copper finish.



The number of outlets, outlet spacing and mounting hole locations can be established according to individual requirements.

Catalog Number	Fig. No.	Cond. Range	Dimensions, Inches	
			H	W
LCB-1/0	3	1/0-14 / 6-14	0.63	0.38
LCB-2/0	3	2/0-14 / 6-14	0.69	0.38


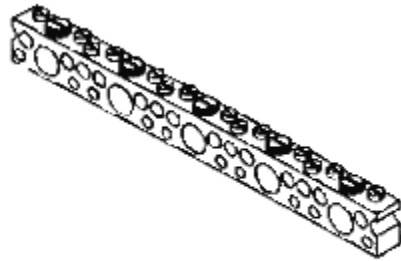


Fig. 3